


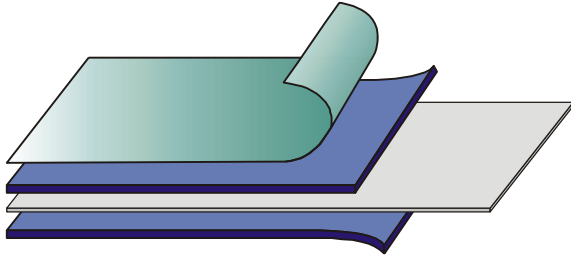
	<b>Product Information</b>  <b>Ref: 422</b>	
--	---	---

## 1. Product Description

Rev Nov 2016

Double-sided self-adhesive tape with PET carrier, clear solvent acrylic adhesive.

## 2. Tape Construction



Total Thickness: 0.160mm  
(excluding liner)

Red MOPP, both sides silicone coated  
weight:

modified acrylic adhesive  
coat weight: approx 67gsm

clear PET thickness: 25 micron

modified acrylic adhesive  
coat weight: 67gsm

## 3. Features

Will bond most surfaces, great all round performance tape. Our 422 is used to fix advertising panels, displays, banners (paper, cardboard, PVC, plastics, plexiglass, etc) even outdoor. Permanent adhesive, high cohesion, very good ageing and UV resistance.

## 4. Product Data

<b>Loop Tack</b>		2.5kg / 25mm
<b>Peel Adhesion</b>	PSTC – 3	1.8kg / 25mm
<b>Shear Strength</b>	PSTC - 7	Over 24 hrs with 1.0kg loading on 25mm x 25mm at 25°C

**Temperature Resistance:** from -20°C to +100°C

### Important Notice

All UKIT products are subjected to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning UKIT products is based upon research, which the Company believes to be reliable, but some information does not constitute a warranty. Because of the variety of possible uses for UKIT products and continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product nor for incidental nor consequential damages. All specifications are subject to change without prior notice.